

## Technical Data Sheet:

## **URAOIL 10.000**

FLUIDERIS MAQUINARIA, S.L. Santelices, 2 • 48550 Muskiz (Bizkaia) • Tfno. (+34) 94 670 64 37 • Fax (+34) 94 670 64 26 • info@fluideris.com

Inscrita en el Registro Mercantil de Bizkaia, Hoja BI-50582, Tomo 4877, Folio 164. C.I.F. B95489498



## **DESCRIPTION:**

Insulating transformer oil plant designed on an easy-operating basis and variable flow rate and manufactured to perform the processes listed as follows in transformers or related equipment working with dielectric oil:

- . Filtration, dehydration and degassing of dielectric oil in batch or on-line modus, in order to achieve removal of water and moist, dissolved gas or air in the oil, drying of the transformer core and insulation, particle content decrease, etc.
- . Intensive drying of the core via hot-oil spray or other similar methods, by using appropriate accesories not included in this proposal (e.g. nozzles)
- . Filling of new and used transformers or related equipmet with dielectric oil.
- . Conditioning or improving the phisical properties (breakdown voltage, water content, particle content) of new and used insulating oil either naphtenic or paraffin based mineral oils, inhibited or non inhibited and passivated (eg. NYNAS TAURUS, X and latest developed mineral branches, SHELL DIALA D, DIALA B, etc.)

The flow rate offered may be varied according to the user's convenience and criteria from 1.000 to 25.000 l/h. This unit is therefore suitable for the processing of any capacity of mineral oil and its performance time will be directly related to the amount of fluid to be treated and the results expected.

The plant is suitable for the obtainance in new dielectric oil considering initial water content of 50 ppm and air content of 10%, of the following values in the parameters:

- . Water content, < 2 mg/Kg.
- . Air content, < 0,04% vol.



## Technical data.-

Variable flow rate Operating vacuum Vacuum pump Oil heater Heating capacity of oil heater, 4 stages

Electrical equipment as per Total power consumption approx. 1000-10.000 I/h 1 mbar 500 m3/h1 90 kW 4 x 22,5 kW 3 x 400 V, 50 Hz IEC Standard 110 kW

Connections to oil treatment plant Oil inlet Oil outlet Max. oil inlet pressure


Quick coupling DN 1 ½" Quick coupling DN 1 ½" 3 bar


Painting of the plant

Blue/grey





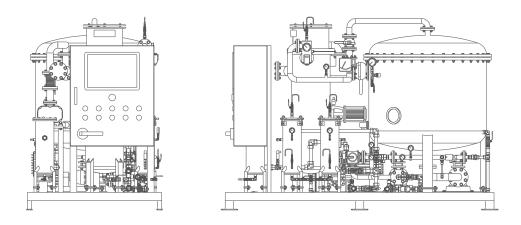



Width	2.000 mm
Deph	1.800 mm
Height	2.500 mm
Weight	2.500 Kg aprox.

FLUIDERIS MAQUINARIA, S.L. Santelices, 2 • 48550 Muskiz (Bizkaia) • Tfno. (+34) 94 670 64 37 • Fax (+34) 94 670 64 26 • info@fluideris.com

Inscrita en el Registro Mercantil de Bizkaia, Hoja BI-50582, Tomo 4877, Folio 164. C.I.F. B95489498